


Part number

PE 3265 PI



Flush-mounting socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 32 A, 380 ÷ 415 V, inclined

Product description		Material properties	
Product type	Socket Flush-mounting	Colour	RAL 7035 grey, RAL 3000 red
Series	PE...PI, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	3 poles + N + 	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Size	Socket fixing centre distance 77 x 85 mm	Approvals / Standards	
Specification	Inclined	Reference standard	EN 60309-1 and -2
Technical data		General ordering information	
Current	32 A	EAN13 code	8015747067454
Voltage	380 ÷ 415 V	Packaging Information	
IP degree of protection	IP44	Packaging length	330,00 mm
Further technical details		Packaging height	175,00 mm
Weight	222,00 g	Packaging width	295,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging weight	2,50 kg
		Packaging volume	17,04 dm ³
		Packaging description	Carton box
		Packaging quantity	10 Pcs
		Packaging EAN code	8015747067461


Part number

PE 3265 PI



Catalogue drawings

(16 / 32A) PE ... PI

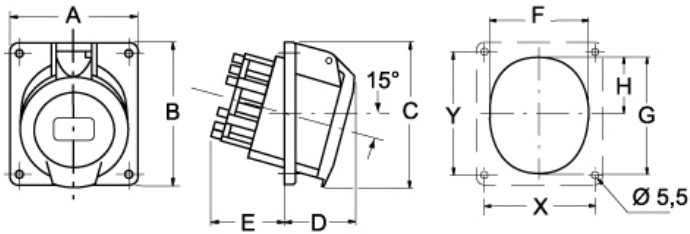

PE ... PI	A	B	C	D	E	F	G	H	X	Y
16A 2P+⊕	64	82	82	38	46	52	62	30	52	60
	64	82	82	42	47	57	65	28	52	60
	92	100	100	43	47	66	78	37,5	77	85
32A 2P+⊕	92	100	100	40	55	68	76	35,5	77	85
	92	100	100	40	55	68	76	35,5	77	85
	92	102	102	43	55	74	86	39,5	77	85

Notes