


Part number

SQV 1645.5



Interlocked switched socket-outlet, SQV series, 3 poles + N + PE, 4 h (yellow), 16 A, 57/100 ÷ 75/130 V, sectionable fuse carrier 10 x 38 mm

Product description

| | |
|-----------------------|---|
| Product type | Interlocked switched socket-outlet |
| Series | SQV |
| N. of poles | 3 poles + N +  |
| Clock position | 4 |
| Size | Socket fixing centre distance 88 x 230 mm |
| Specification | Sectionable fuse carrier 10 x 38 mm |

Technical data

| | |
|--------------------------------|-------------------|
| Current | 16 A |
| Voltage | 57/100 ÷ 75/130 V |
| IP degree of protection | IP55 |

Further technical details

| | |
|--|-----------------|
| Weight | 604,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |
| IK rating (impact degree of protection) | IK08 |

Material properties

| | |
|------------------------------|--|
| Colour | RAL 7035 grey, RAL 1021 yellow |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | F6799547-ab84-42f2-938f-233ba663766d |

Approvals / Standards

| | |
|---------------------------|---------------------|
| Reference standard | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747087544 |
|-------------------|---------------|

Packaging Information


| | |
|----------------------------------|----------------------|
| Sub-packaging length | 116,00 mm |
| Sub-packaging height | 103,00 mm |
| Sub-packaging width | 230,00 mm |
| Sub-packaging weight | 0,60 kg |
| Sub-packaging volume | 2,75 dm ³ |
| Sub-packaging description | Carton box |
| Sub-packaging quantity | 1 Pcs |
| Sub-packaging EAN barcode | 8015747087551 |

Part number


SQV 1645.5



Catalogue drawings

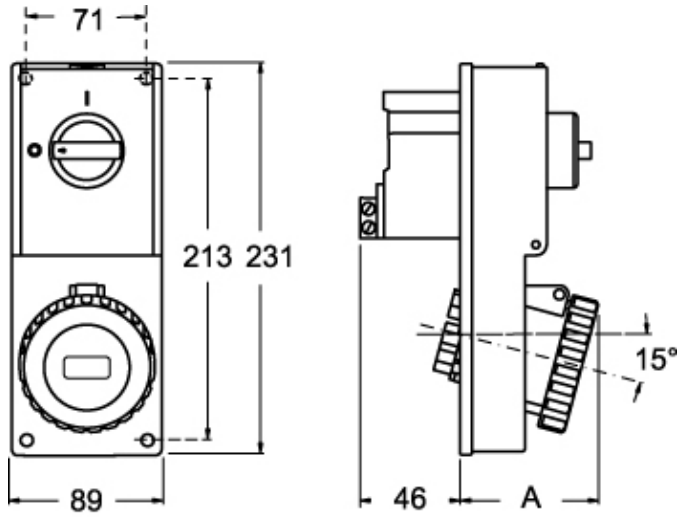

Catalogue drawings

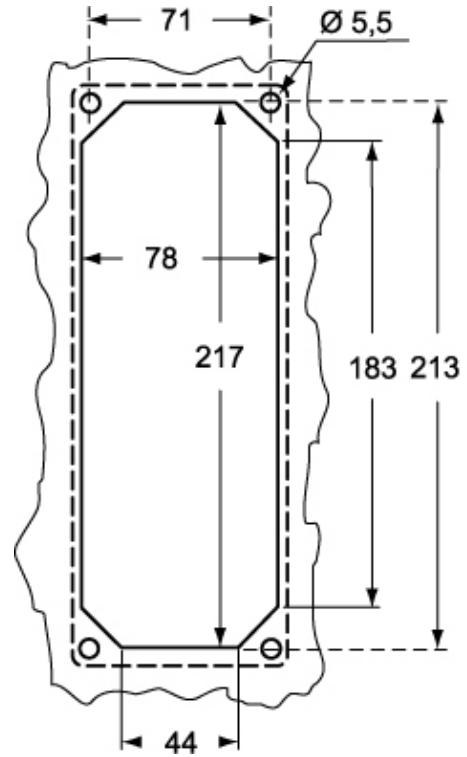

| SQV.5 | | A |
|-------|--------|----|
| 16A | 2P+⊕ | 67 |
| | 3P+⊕ | 67 |
| | 3P+N+⊕ | 70 |