


Part number

PHW 1664 SV



Mobile plug, PLUSO HEAVY DUTY series, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V, straight

Product description

Product type	Plug Mobile
Series	PHW...SV, PLUSO HEAVY DUTY
Connection type	Screw terminal connection
N. of poles	3 poles + 
Clock position	6
Specification	Straight

Technical data

Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP66 / IP67
Further technical details	
Weight	160,00 g
Operating temperature range (min, max)	-40°C ... +100°C

Material properties

Colour	RAL 7012 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747084758
-------------------	---------------

Packaging Information

Packaging length	208,00 mm
Packaging height	140,00 mm
Packaging width	290,00 mm
Packaging weight	1,64 kg
Packaging volume	8,44 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747084901


Part number

PHW 1664 SV



Catalogue drawings

(16 / 32A) PHW ... SV

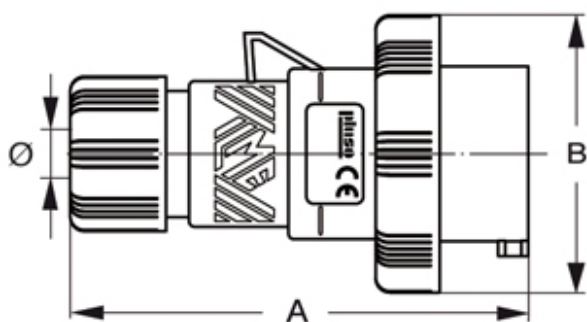

PHW...SV	A	B	\varnothing min	\varnothing max
16A 2P+ \oplus	129	70	7	16
3P+ \oplus	129	77	7	16
3P+N+ \oplus	129	86	8	24
32A 2P+ \oplus	150	92	8	24
3P+ \oplus	150	92	8	24
3P+N+ \oplus	150	100	8	24