


Part number

PE 1683 PV



Mobile socket outlet, PLUSO series, 2 poles + PE, 8 h (white), 16 A, > 250 V

Product description

Product type	Socket Mobile
Series	PE...PV, PLUSO
Connection type	Screw terminal connection
N. of poles	2 poles + 
Clock position	8

Technical data

Current	16 A
Voltage	> 250 V
IP degree of protection	IP44

Further technical details

Weight	120,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 9010 white
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747065276
-------------------	---------------

Packaging Information

Sub-packaging length	175,00 mm
Sub-packaging height	100,00 mm
Sub-packaging width	235,00 mm
Sub-packaging weight	1,20 kg
Sub-packaging volume	4,11 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	10 Pcs
Sub-packaging EAN barcode	8015747065283


Part number

PE 1683 PV



Catalogue drawings

(16 / 32A) PE ... PV

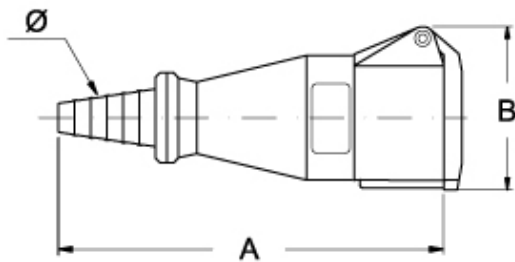

PE...PV		A	B	Ø min	Ø max
16A	2P+⊕	157,5	68	7	17
	3P+⊕	164,5	76	7	17
	3P+N+⊕	183,5	83	9	22
32A	2P+⊕	200,5	87	9	22
	3P+⊕	200,5	87	9	22
	3P+N+⊕	200,5	91	9	22