


Part number

# PHW 12565 PV



Mobile socket outlet, PLUSO HEAVY DUTY series, 3 poles + N + PE, 6 h (red), 125 A, 380 ÷ 415 V

| Product description                           |   | Material properties              |  |
|---|---|----------------------------------|--|
| <b>Product type</b>                           | Socket<br>Mobile  | <b>Colour</b>                    | RAL 7012 grey, RAL 3000 red  |
| <b>Series</b>                                 | PHW...PV, PLUSO HEAVY DUTY  | <b>RoHs conformity</b>           | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>Connection type</b>                        | Screw terminal connection   | <b>China RoHs - EFUP</b>         | 50   |
| <b>N. of poles</b>                            | 3 poles + N +  | <b>REACH SVHC substances</b>     | Yes<br>Lead  |
| <b>Clock position</b>                         | 6   | <b>SCIP number</b>               | Ca7de37f-add8-4b77-9861-279c94903ade   |
| Technical data                                |   | Approvals / Standards            |  |
| <b>Current</b>                                | 125 A   | <b>Reference standard</b>        | EN 60309-1 and -2  |
| <b>Voltage</b>                                | 380 ÷ 415 V   | General ordering information     |  |
| <b>IP degree of protection</b>                | IP66 / IP67   | <b>EAN13 code</b>                | 8015747144520  |
| Further technical details                     |   | Packaging Information            |  |
| <b>Weight</b>                                 | 2.150,00 g  | <b>Packaging length</b>          | 330,00 mm  |
| <b>Operating temperature range (min, max)</b> | -40°C ... +100°C  | <b>Packaging height</b>          | 170,00 mm  |
|   |   | <b>Packaging width</b>           | 230,00 mm  |
|   |   | <b>Packaging weight</b>          | 4,56 kg  |
|   |   | <b>Packaging volume</b>          | 12,90 dm <sup>3</sup>  |
|   |   | <b>Packaging description</b>     | Carton box   |
|   |   | <b>Packaging quantity</b>        | 2 Pcs  |
|   |   | <b>Packaging EAN code</b>        | 8015747202930  |
|   |   | <b>Sub-packaging weight</b>      | 2,28 kg  |
|   |   | <b>Sub-packaging description</b> | Plastic packaging  |
|   |   | <b>Sub-packaging quantity</b>    | 1 Pcs  |
|   |   | <b>Sub-packaging EAN barcode</b> | 8015747144674  |


Part number

# PHW 12565 PV



## Catalogue drawings

(63 / 125A) PHW ... PV

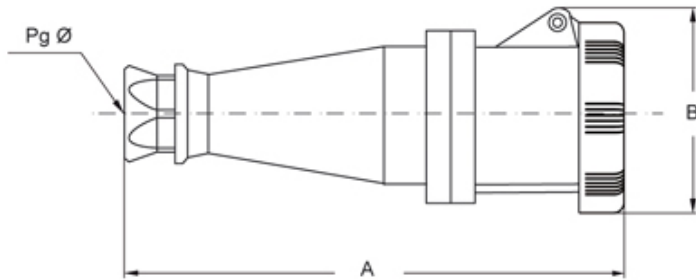

| PHW...PV |        | A   | B     | Pg ø  |
|----------|--------|-----|-------|-------|
| 63A      | 2P+⊕   | 277 | 108,5 | 36    |
|          | 3P+⊕   | 277 | 108,5 | 36    |
|          | 3P+N+⊕ | 277 | 108,5 | 36    |
| 125A     | 2P+⊕   | 324 | 120,5 | 2"gas |
|          | 3P+⊕   | 324 | 120,5 | 2"gas |
|          | 3P+N+⊕ | 324 | 120,5 | 2"gas |