


Part number

PHW 12565 SV



Mobile plug, PLUSO HEAVY DUTY series, 3 poles + N + PE, 6 h (red), 125 A, 380 ÷ 415 V, straight

Product description		Material properties	
Product type	Plug Mobile	Colour	RAL 7012 grey, RAL 3000 red
Series	PHW...SV, PLUSO HEAVY DUTY	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	3 poles + N + 	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Specification	Straight	Approvals / Standards	
Technical data		Reference standard	EN 60309-1 and -2
Current	125 A	General ordering information	
Voltage	380 ÷ 415 V	EAN13 code	8015747144551
IP degree of protection	IP66 / IP67	Packaging Information	
Further technical details		Packaging length	330,00 mm
Weight	1.710,00 g	Packaging height	170,00 mm
Operating temperature range (min, max)	-40°C ... +100°C	Packaging width	230,00 mm
		Packaging weight	3,83 kg
		Packaging volume	12,90 dm ³
		Packaging description	Carton box
		Packaging quantity	2 Pcs
		Packaging EAN code	8015747202923
		Sub-packaging weight	1,92 kg
		Sub-packaging description	Plastic packaging
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747144735


Part number

PHW 12565 SV



Catalogue drawings

(63 / 125A) PHW ... SV

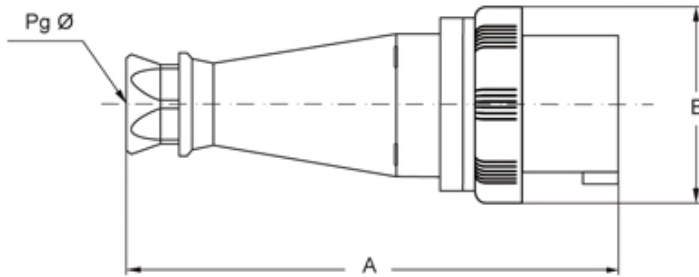

PHW...SV		A	B	Pg ø
63A	2P+⊕	264,5	112	36
	3P+⊕	264,5	112	36
	3P+N+⊕	264,5	112	36
125A	2P+⊕	310	130	2"gas
	3P+⊕	310	130	2"gas
	3P+N+⊕	310	130	2"gas